

SUB. SQ. TAPER HEAD BOLTS FOR PRY. SEC.


DRAWN

CHECKED

AND PYROLUSITE MILL, CONE CRUSHER.

APPROVED

DRG. NO. UCI/M-891/A

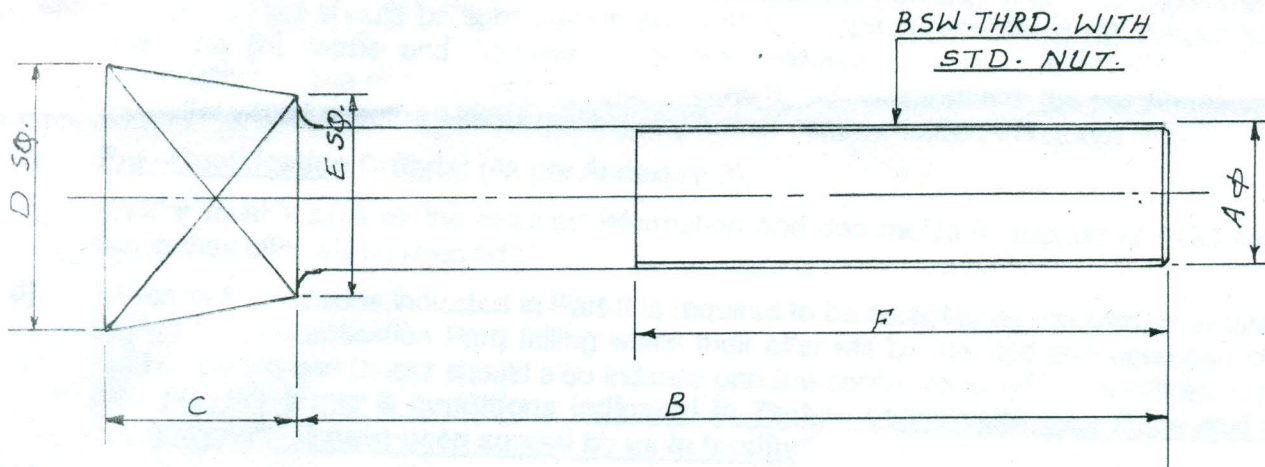

ITEM NO.	SIZE	A Φ	B	C	D SQ.	E SQ.	F.	REF. DRG. No. UCI/M-93/A.
1	7/8" x 13"	7/8"	13"	1 1/4"	1 1/2"	1 1/32"	3 1/4"	FOR GRID LINER, PRY. SEC. MILL & CONE CRUSHER.
2.	1 1/8" x 4 1/2"	1 1/8"	4 1/2"	1 1/2"	2"	1 1/4"	3"	FOR FEED END LINER & SHELL LINER (PRY. SEC. MILL)
3.	3/4" x 4 1/2"	3/4"	4 1/2"	1"	1 3/8"	1 1/32"	2 3/4"	FOR DISCHARGED END LINER, P. & S. MILL
4.	3/4" x 3"	3/4"	3"	1 1/4"	1 1/2"	1"	2"	FOR PYROLUSITE MILL

MAT'L. En-8, FORGED & HEAT TREA-  
TED STEEL.

TENSILE STRENGTH 40/45 TON/SQ. INCH.

HARDNESS 200-230 B.H.N.