


SPECIFICATION OF TURNBUCKLE

- Turnbuckle Assembly with combination of one end **Jaw** and other End **Eye** fittings.
- The threads of end fittings shall be Modified UNJ Threads.
- The Threads of Body shall be UNC threads.
- The Proof Load shall be 2.5 times the Working Load Limit. Ultimate Load shall be 5 times working Load Limit.
- The MOC of Turnbuckle Assembly shall be SS316 only.
- The dimensions of Turnbuckle are as below :

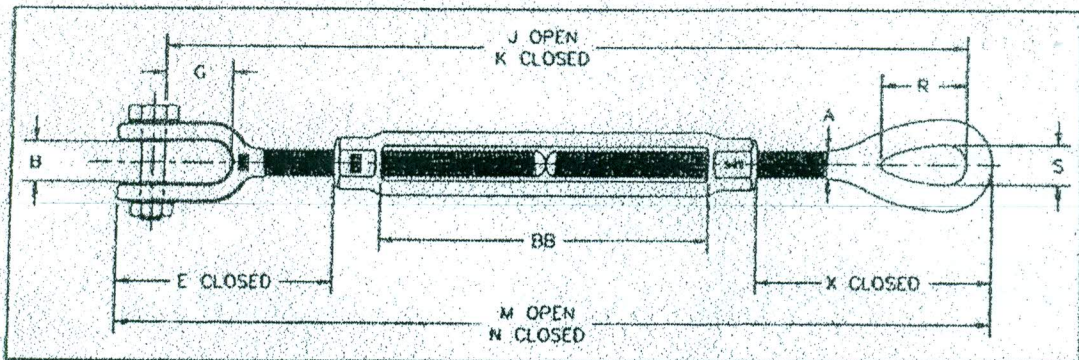

Thread Diameter & Take up (in)	Dimensions (in)											
	A	B	G	J Open	K Closed	M Open	N Closed	R	S	X Closed	BB	E Closed
1/2x6	.50	.63	1.06	19.29	12.29	20.48	13.48	1.44	.72	3.23	6.00	2.75

Handwritten signature