
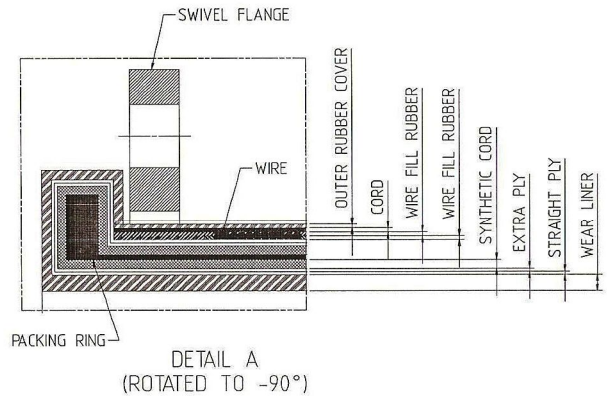


SL. NO.	SIZE	'D'	'B'	'C'	'R'	FLANGE O.D.	THK	P.C.D.	HOLE DIA	No. OF HOLES
1	200	± 3	700	700	600	343	25	298	22,2	8

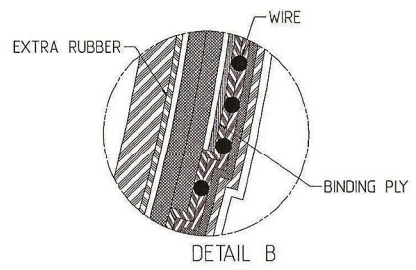

NOTE:
1. DESIGN WORKING PRESSURE 10 kg/cm²
2. TEST PRESSURE 13 kg/cm²
3. ALL FLANGES ARE DRILLED TO ANSI B16.5 CLASS 150.
4. MOC:
FLANGES & PACKING RING - MS
WEAR LINER - LINATEX RUBBER (NATURAL RUBBER COMPOUND BLACK)
REINFORCEMENT - SYNTHETIC CORDS & STEEL WIRE
COVER - NATURAL / SYNTHETIC RUBBER COMPOUND

ALL DIMENSIONS ARE IN mm

CLIENT : U.C.I.L.
PROJECT :

FOR LISTS OF UNTERSTANDARD DIMENSIONS REFER TO Dwg. AG-100/95		OFFICE OF DESIGN : BANGALORE		PRODUCT : LINATEX® Rubber Products			
SCALENTS		APPR. SV		CHK. SV		DRN. NA/EN	
DATE: 18 JUL 2017		SHEET 1 OF 1		TITLE : 200mm (8")X 3D X 90 deg. BEND HOSE WITH SWIVEL FLANGES		DRAWING No. A1-100-01-5014694	
REV		BY		DATE		CHK	
1		DESCRIPTION		DATE		CHK	